




## PEH-2 Heater

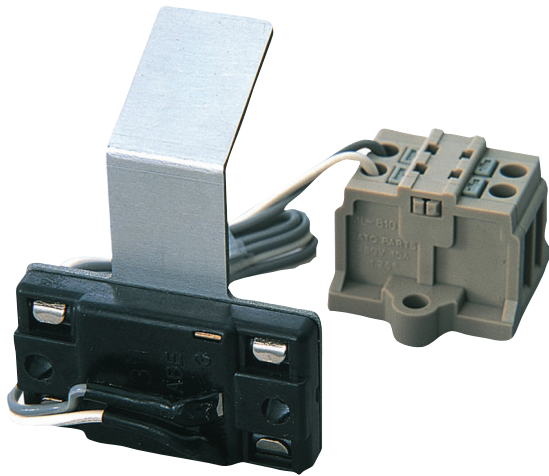

The PEH-2 Heater is a heating device that prevents frost accumulation on photoelectric beam detector covers, promoting stable performance.

### Installation/Configuration Notes

#### Compatibility Information

**Photoelectric Beam Detectors**    **DS484Q, DS486Q, DS453Q, and DS455Q**

### Parts Included

Quantity	Component
2	Heaters (heating element, radiator, terminal)
4	Heater mounting screws
4	Terminal mounting screws
2	Stoppers
1	Installation Guide

### Technical Specifications

#### Weight

Total Weight:                    15 g (0.03 lb)

- ▶ **Automatic temperature control maintains a constant temperature**
- ▶ **Made of durable ceramic to withstand weathering**
- ▶ **Horizontally adjustable radiator coordinates with the angle of photoelectric detector optical modules**

### Environmental Considerations

Operating Temperature:    -25°C to +60°C (-13°F to +140°F)

Relative Humidity (RH):    Up to 95%

Surface Temperature:      +55°C (131°F)

### Power Requirements

Power Supply Voltage:      20 VDC to 28 VDC non-polarized

Current Draw:                350 mA maximum when power is applied  
110 mA during operation (for each heater)

Backup Power Requirements: 4 hours (440 mAh) minimum required for UL Certified Installations

### Ordering Information

#### PEH-2 Heater

Reduces the effects of frost, intense fog, cold, and damp conditions on photoelectric beam detectors. Shipped in packages of four (two for transmitter and two for receiver).

#### PEH2

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6258 5511  
Fax: +65 6571 2698  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**